



solid solutions to better hardscapes

Polymeric Sand/Edging

**CLEAN. STRONG. FAST.
GUARANTEED**



BETTER products • BETTER service • BETTER support • BETTER results

Polymeric Sand



SRW PAVERMATE™

Superior Durability for Paver Joints up to 38 mm

The **Advanced Polymer Technology™** in PAVERMATE creates superior durability for paver joints up to 38 mm without haze, cracking, washout or weeds. The only worry-free polymeric sand on the market!

Benefits

- ▶ Exclusively engineered polymer blend for better activation and fast set-up
- ▶ Superior bond and longevity
- ▶ Specifically manufactured to prevent hazing
- ▶ Fine gradation of sand fits in even the tightest joints

Applications

- ▶ Joints up to 38mm
- ▶ Standard or Tumbled Paver Joints
- ▶ Driveways
- ▶ Pool Decks
- ▶ Patios
- ▶ Walkways

User Tips

1. Recommended for joints between 3.2–38 mm at intersecting points. Minimum joint depth of 38 mm.
2. Proper compaction is essential for optimal joint strength.
3. Not recommended for flagstone patios, concrete overlays or wet/heavily shaded areas. Continuous dampness can prevent polymeric sand from curing properly.
4. Coverage varies. Typical coverage is 5.1–6.97 sqm per 23 Kg bag for narrow joints or 1.86–2.79 sqm for wide joints.



WATCH NOW


How-To Video
bitly.com/SandVid

Watch the how-to video on our YouTube channel for a detailed look at installation techniques from our industry expert.

*Enlarged to show detail. Actual color and availability varies by geographic location.

Polymeric Sand

SRW X-TREME Wide Joint



Adds X-TREME Strength to Wide Joints up to 100 mm

SRW X-TREME is unlike any other polymeric sand on the market. Its **Advanced Polymer Technology™** is expertly engineered with the user in mind—ensuring flawless installation every time.

Benefits

- ▶ Exclusively engineered polymer blend for better activation and fast set-up
- ▶ Long-lasting, solid strength and durability
- ▶ Specifically manufactured to prevent hazing
- ▶ Won't crack, flake or peel
- ▶ Helps prevent ant infestation and weed growth

Applications

- ▶ Joints up to 100 mm
- ▶ Natural Stone
- ▶ Wetcast
- ▶ Patios
- ▶ Walkways

User Tips

1. Recommended for joints between 13–100 mm wide at intersecting points. Minimum joint depth of 38 mm.
2. Irrigation systems should be turned off until polymeric sand has fully cured.
3. Continuous dampness can prevent polymeric sand from curing properly. Not recommended for concrete overlays or wet/heavily shaded areas. Turn off irrigation systems.
4. Coverage varies. Typical coverage is 1.86–4.18 sqm per 23 Kg bag for joint widths of 25–38 mm.



BILINGUAL INSTRUCTIONS:
bitly.com/polysand

Get the instructions and learn how our Advance Polymer Technology makes installation worry free.

Paver Rail Edging



3 Convenient Edging Styles!




Flex

Most Flexible Option...Can Be Used Curved or Straight!

Flex Paver Rail can be applied on both straight and curved applications. It is flexible for quick and easy installation. Flex creates a permanent and invisible barrier between pavers and other landscape materials.

Benefits

- ▶ Straight and curved applications
- ▶ For use with spikes or staples

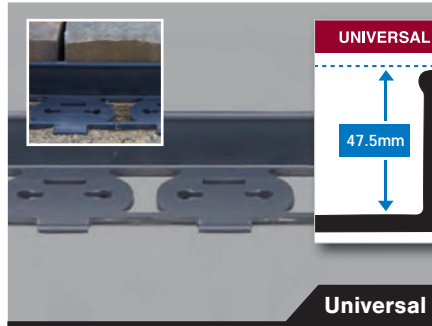


Universal

The Best All-Around Product for Most Project Types

Universal Paver Rail creates a permanent and invisible barrier between hardscapes and other landscape materials. It can be used on both straight and curved applications on a wide variety of projects. It's the best all-around product.

Benefits

- ▶ Straight and curved applications
- ▶ For use with spikes, staples or stakes

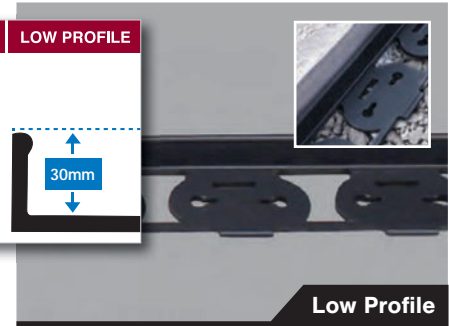

Low Profile

Ideal for Thin Pavers, Natural Stone and Wetcast Slabs

Low Profile Paver Rail can be installed against wetcast or natural stone to prevent shifting. It provides fast and easy installation while creating a permanent and invisible barrier between landscape materials.

Benefits

- ▶ Low profile projects like natural stone
- ▶ For use with spikes, staples or stakes

Staples & Spikes for Any Project!

Paver Rail Spikes

SRW's spikes can be used with any of our Paver Rail edging options. We conveniently carry an option of 10" or 12" (25.4cm or 30.48cm) spikes for your project needs.

Benefits

- ▶ Multiple sizes and styles available for convenience
- ▶ For use with all SRW Paver Rail edging styles

Paver Rail Staples

SRW Paver Rail edging can be installed with spikes or staples. Our staples make for a simple install and save you money.

Benefits

- ▶ 8 gauge, 10" (25.4cm) staples for easy installation
- ▶ For use with all SRW Paver Rail edging styles

