



**BAINES
MASONRY**
Quality First

Norfolk[®] Retaining Wall System

Beware of imitations!

- ✓ Economic to build
- ✓ No mortar required
- ✓ Do It Yourself
- ✓ Structurally Sound
- ✓ Low maintenance



Australian Owned, Designed and Manufactured

member of




BAINES MASONRY
900 Wilton Road (P.O. Box 89) Appin NSW 2560
Tel: (02) 4631 1383 Fax: (02) 4631 1402
info@bainesmasonry.com.au
www@bainesmasonry.com.au

Product Information: Norfolk® Blocks



Norfolk Block
 390mm x 190mm x 180mm
 1 sqm wall = 14 blocks
 18.5 kg each
 90 per pallet
 Code 020-144



Norfolk Capping Block
 390mm x 190mm x 180mm
 1 lineal m = 2.56 blocks
 21.5 kg each
 90 per pallet
 Code 020-146

Computer Design Program Available
 visit www.bainesmasonry.com.au/contactus.htm
 Complies with AS 4678 & MA 53

Calculating Block Quantities


20 metres long x 0.9m high = 18m² x 14 blocks per m² = 252 blocks
 LESS 20 lineal metres x 2.56 capping blocks per metre = 52 capping blocks required overall
 Blocks required to complete job = 200 Norfolk Block + 52 Norfolk Capping Blocks

Note: For Norfolk walls over 900mm high, please seek specific engineering advice


Norfolk Colour Range




Colours displayed in this brochure are to be used as a guide only. Colours are as close as printing process will allow. Displays in stores may vary to actual colour due to batch variations. Obtain samples from Baines Masonry for current batch colour. Care should be taken to order sufficient product to complete job at the one time to avoid batch variation. Surplus blocks are not returnable. No claim after 7 days or once products have been incorporated in construction. Not all colours available in every region please check with your supplier




SRW® Products for Segmental Retaining Walls




SRW Adhesive
 SRW Adhesive has been time-tested and proven its performance in countless projects for over 25 years.




SRW RWX
 Specialty Seal™ RWX Retaining Wall X-treme protects retaining wall blocks against damaging elements like water intrusion.




SRW SS5
 Used to separate the leveling pad materials from the sub-base which increases strength.

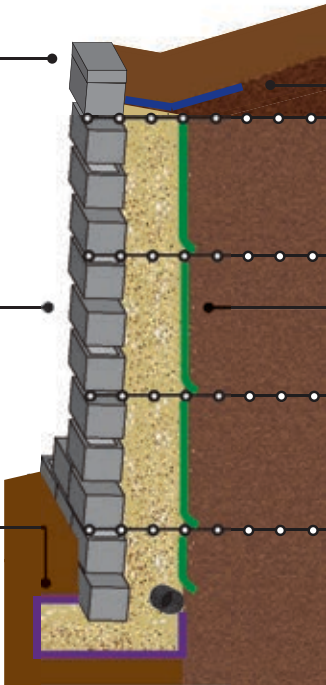


SRW NW4.5
 Used as separation at the top of the wall to prevent soil migration into the drainage aggregate.



SRW SB3
 Used as filtration behind the retaining wall, keeping debris out and water flowing through.



SRW Geogrid
 SRW geogrid stabilises retaining walls, preventing premature wall failure and increasing life span.



Refer to Evaluation and Installation Guide or website for specifications.
 Check with your local Council to ensure all local building codes are complied with.

Norfolk® is a registered trade mark of Baines Masonry and is used under licence.
 Please see our full terms and conditions on our website www.bainesmasonry.com.au