



solid solutions to better hardscapes

Sealers

Wetcast Seal™

ENHANCE

Wetcast Color

RESTORE

Wetcast Beauty

PROTECT

Your Investment



BETTER products • BETTER service • BETTER support • BETTER results



Choose the Best Formula for Your Wetcast Project

SRWI PRODUCTS Wetcast Seal™ APPLICATION CHART	Surface Material		SRW Sealer Benefits				
	Wetcast	Manufactured/ Cultured Stone	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt/ Frost Damage	UV Resistance	Commercial Grade
W-PSX PENETRATING X-TREME	X	X	X		X		X
W-HGX HIGH GLOSS X-TREME	X	X		X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations for sealing.

W-PSX Penetrating X-treme



Benefits

- ▶ Invisible/natural-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Ideal for high traffic areas
- ▶ Interior/exterior

Applications

- ▶ Wetcast
- ▶ Cultured Stone

Not for use on structures under hydrostatic pressure



(Check the chart for specific recommendations.)

Instructions



bitly.com/W-PSXsealer

W-HGX High Gloss X-treme



Benefits

- ▶ High-gloss, wet-look finish
- ▶ Highly durable long-lasting protection
- ▶ Provides UV protection
- ▶ Ideal for high traffic areas
- ▶ Color enhancing

Applications

- ▶ Wetcast
- ▶ Cultured Stone

Not for use on structures under hydrostatic pressure



(Check the chart for specific recommendations.)


Instructions



bitly.com/W-HGXsealer



TIP Clean Before Sealing

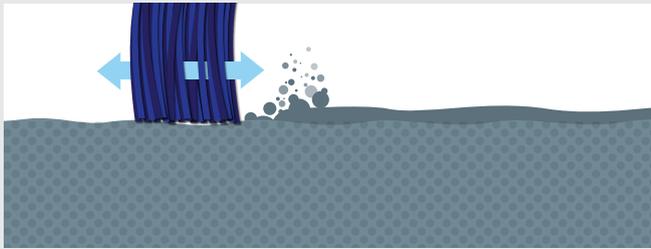

Use WW Wetcast Clean, even if there are no visible stains, to remove the release agents from the surface to prepare the area for optimal bond with the sealer. *Get the most out of your sealer investment by cleaning first!*

See below for general-purpose cleaners
See back page for specialty cleaners

Wetcast Clean WW Wetcast Wash



Benefits

- ▶ Removes release agents for optimal bond with sealer
- ▶ Removes ground-in dirt, light grease and oil
- ▶ Non-acidic formula
- ▶ Easy to use, concentrated formula

Applications

- ▶ Wetcast

Not for use on sealed surfaces. Use after spot treatments.

Instructions



bitly.com/WWcleaner

DG Dual Guard



Benefits

- ▶ 2 levels of protection in 1 easy application
- ▶ Long-lasting penetrating protection
- ▶ Color enhancing, wet-look finish
- ▶ Acrylic/siloxane blend
- ▶ Commercial strength

Applications

- ▶ Concrete Pavers
- ▶ Most Natural Stone
- ▶ Wetcast
- ▶ Cultured Stone

Not for use on structures under hydrostatic pressure



Instructions



(Check the chart for specific recommendations.)

bitly.com/DGsealer

This Specialty Seal™ product works great on wetcast!

FAQ

Get answers to our most commonly asked questions. Have a question not answered here? Call us on 1300 779 776 or e-mail info@bainesmasonry.com.au

SRW
PRODUCTS

solid solutions to better hardscapes

How long should I wait to seal after installing polymeric sand?

Wait for sand to fully cure before sealing. Be sure the moisture has been released. We recommend waiting at least 28 days after polymeric sand installation.

What if there are stains on my wetcast?

Clean your wetcast with one or more of these SRW Specialty Clean™ products **before** you seal. Then, wait at least 24 hours before sealing to ensure surface and joints are completely dry.

OC Organic Stain Cleaner



Benefits

- ▶ Removes tar, gum, rubber and paint
- ▶ Easy to use
- ▶ Rinses clean with water

TR Tar Gum & Rubber Remover



Benefits

- ▶ Breaks down organic stains from leaves, pine needles, acorns, fruit, wine, etc.
- ▶ Rinses clean with water

MC Mold, Moss & Mildew



Benefits

- ▶ Breaks down mold, moss, mildew, lichen and algae
- ▶ Non-acidic, no-bleach formula
- ▶ No scrubbing or rinsing!

CD Cleaner & Degreaser



Benefits

- ▶ Removes grease, oil and dirt
- ▶ Rinses clean with water
- ▶ Heavy-duty concentrated formula

RE Rust Eliminator



Benefits

- ▶ Removes rust and hard water stains
- ▶ Rinses clean with water
- ▶ Fast-acting concentrated formula

What do I use to clean up after sealing?



SRW XY Xylene is a fast-acting solvent that thins and dissolves acrylic sealer to aid in tool clean up and overspray.

What if I need to remove sealer?



SRW has a solution for every need. SS Sealer Stripper is a biodegradable, yet industrial-strength formula that removes sealing and curing compounds.

Is it necessary to use an SRW Slit Foam Roller?

Yes. A slit foam roller is the best choice for backrolling because it helps evenly distribute the sealer and prevent it from pooling.



Is it necessary to use a sprayer to apply?

While you can successfully apply SRW sealers using only a Slit Foam Roller, it is highly recommended that a sprayer is used to apply an even coat. A second person would then follow the sprayer with a slit foam roller to make sure the sealer is evenly distributed and prevent it from pooling.



Can I seal if rain is in the forecast?

SRW recommends a clear forecast for at least 24 hours before and after sealer application.